


CYANSKY™



P25 V2.0

High Performance Tactical Flashlight

User Manual


CYANSKY P25 V2.0 is a super bright, high-performance tactical flashlight. It is lightweight and portable, perfect for home lighting and outdoor lighting. With a maximum brightness of 3600 lumens and a maximum runtime of 80 hours, it has 4 brightness levels regular lighting modes and STROBE mode, SOS mode, and ECO mode, making it suitable for various outdoor scenarios. In addition, P25 V2.0 achieves IPX8 waterproof rating, can resist 2 meters impact, is rugged and durable, can work in different harsh environments, and is your outdoor lighting reliable partner.

Specifications

FL1 STANDARD	General Mode				Special Mode		
	LOW	MED	HIGH	TURBO	STROBE	SOS	ECO
OUTPUT(Lumens)	50	200	800	3600	1600	200	5
RUNTIME(Hours)	25	10	3	2	-	-	80
DISTANCE(Meters)	24	49	97	208	-	-	-
INTENSITY(Candelas)	144	600	2350	10800	-	-	-
IMPACT RESISTANCE	2 meters						
WATERPROOF	IPX8 (2 meters underwater)						
SIZE	1.18" * 0.96" * 5.72" / 30 * 24.4 * 145.4 mm						
WEIGHT	3.46 oz / 98 grams (excluding battery and accessories)						
WORKING TEMPERATURE	-30°C - 50°C / -22°F - 122°F						

Note: The above parameters (laboratory tests using CYANSKY BL2150U 5000mAh 21700 rechargeable lithium-ion batteries) may vary depending on the flashlight, battery, and environment.

Discharging Curve

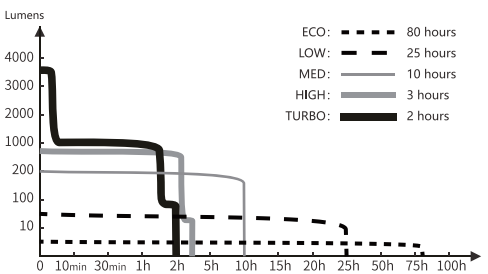

Certifications

CE, WEEE, FCC, sea/air safe transport.

Product Features

- 1 * Cree XHP70.3 LED with 50,000 hours of lifespan
- Powered by a rechargeable 5000mAh 21700 lithium-ion battery
- Tail Tactical switch, one tap to light up
- Body mode switch for changing output mode
- With battery power indication in power-on and voltage warning function
- Circuit constant current output to maintain consistent brightness
- Intelligent IC controls temperature to avoid overheating caused by product damage or surface overheating caused by discomfort.
- Shell is made of A6061-T6 aircraft-grade hard aluminum alloy
- 2 optional colors:
 - Black: HAIII hard-anodized anti-abrasive processing surface
 - Pale Silver: surface micro-arc oxidation processing surface
- Tempered glass lens with double-sided coating
- Lighting angle: 26° spotlight angle, 85° floodlight angle.
- Anti-reverse connection design to prevent the battery from being installed in reverse, causing harm to the circuit
- Anti-roll and anti-slip body design
- Intelligent memory function
- IPX8 waterproof
- 2 meters of impact resistance

Operating Instruction


Power On/Off

- Tap the tactical tail switch to momentarily turn on the flashlight. Release and the flashlight will go out.
- Fully press the tactical tail switch to turn on/off the flashlight. The flashlight will light up in saved mode.

Switching in General Mode

When the power is on, press the electronic switch on the body within 0.5 seconds to switch the general mode: LOW - MED - HIGH - TURBO.

Switching in Special Mode

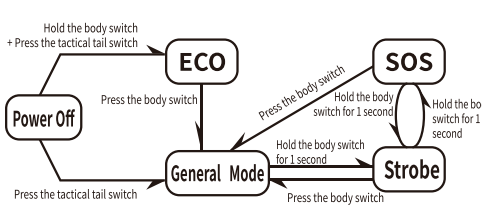

Memory Function

The flashlight has a memory function. When the flashlight is turned off, it will save the mode used before. No saving for the TURBO mode. If it is turned off in TURBO mode, it will save the HIGH mode.

Battery Level Indication

The indicator will show the battery power level when power is on. The indicator will go off after 3 seconds.
Battery power level:
Green light: 81%-100%;
Green light blinking: 51%-80%;
Red light: 21%-50%;
Red light blinking: 0%-20%.

Low Voltage Warning

When the battery is low, the power indicator flashes red light continuously 3 times per second, and the current working LED light flashes 2 times every 3 minutes. It reminds the user to replace the battery.

Low Voltage Lower Working Mode

When the flashlight detects that the battery voltage is lower than 3.0V, the flashlight will lower the current working mode until the LOW mode.

Protection for Limit Time

TURBO mode with time limit protection design. After working on the TURBO mode (3600 lumens) for 1 minute, the flashlight will lower automatically to 1000 lumens to avoid overheating. Then it will adjust the brightness according to the temperature security.

Temperature Control Protection

The product temperature is higher than the safety value will reduce the product brightness through temperature control to avoid product damage and injury to the user.


Caution

- When carrying, please turn the battery cover loose half a turn to let the product power off to avoid mistakenly lighting up while carrying. If turned on mistakenly while carrying, it will consume electricity and may burn the objects around the headlamp due to the product heating up.
- Please remove the batteries when the product is left unused.
- Children must use this product under adult supervision.
- Do not look directly at the product due to its high brightness, as this may cause eye injury and temporary blindness.
- Do not put the product with the battery into the fire. Otherwise, it will explode.
- Do not put the product with opened cover into water.
- Do not connect battery positive and negative terminals backward.

Warranty Terms

- 15 days free replacement: If the product has quality problems under normal use within 15 days from the date of sale, customers can choose to replace the new product. The replacement product should be the same model and specifications as the new product. As the same model and specifications are no longer in production, the replacement will be not lower than the original product performance of similar products of the same brand.

CYANSKY™

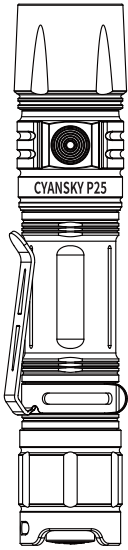

P25 V2.0

高性能战术手电

产品说明书


CYANSKY P25 V2.0是一款超高亮度、高性能的战术手电筒。它轻巧便携，非常适合居家照明与户外照明。最高亮度3600流明，最长续航80小时，拥有4种亮度档位的常规照明模式，还具备爆闪模式、SOS模式和月光模式，适用于户外各种场景。此外，P25 V2.0达到了IPX8的防水等级，能抗2米冲击，坚固耐用，能够在各种严酷的环境中持久工作，是您户外照明的可靠的好伙伴。

产品参数

性能	常规模式				特殊模式	
	低亮	中亮	高亮	极亮	爆闪	SOS / 月光档
亮度 (流明)	50	200	800	3600	1600	200 / 5
续航 (小时)	25	10	3	2	-	- / 80
射程 (米)	24	49	97	208	-	- / -
发光强度 (坎德拉)	144	600	2350	10800	-	- / -
防跌落高度	2米					
防水级别	IPX8 (水下2米)					
尺寸	30 * 24.4 * 145.4 mm					
重量	98克 (不含电池)					
工作温度	-30°C - 50°C / -22°F - 122°F					

注意：上述参数（使用 CYANSKY BL2150U 5000mAh 21700 可充电锂离子电池进行实验室测试）可能因手电筒、电池和环境而异。

放电曲线

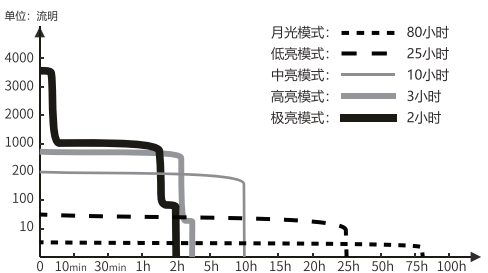

认证

CE, WEEE, FCC, 海运/空运运输鉴定报告。

产品特点

- 使用一颗 Cree XHP70.3灯珠，寿命达50000小时
- 由一节可充电5000mAh 21700锂离子电池供电
- 尾部战术开关，一触即亮
- 颈部调光按钮，一键调光切换
- 具有开机电量指示和电压警示功能
- 电路采用恒流输出，保持稳定亮度
- 产品采用智能IC控制温度，避免过热引起产品损坏或表面过烫造成不适，以提供更好的用户体验和更长的使用寿命
- 由耐用的高强度和抗氧化铝制成
- 2种可选外观：
 - 黑色：表面HAIII 硬质阳极氧化抗磨处理
 - 大理石色：表面微弧氧化处理
- 钢化玻璃镜片加双面镀膜
 - 照明角度：聚光26度 泛光85度
- 防反接设计，防止电池装反对接电路造成的危害
- 防震、防滚的筒身设计
- 智能记忆电路
- IPX8 级别防水
- 2米抗冲击

操作说明


开/关机

- 轻按尾部战术开关暂时点亮手电，放开即熄灭；
- 完全按下尾部战术开关进行开/关机。开机进入记忆档位。

换档

开机点亮状态下，0.5秒内单击筒身颈部电子开关换档。
档位循环：低亮 - 中亮 - 高亮 - 极亮。

切换模式

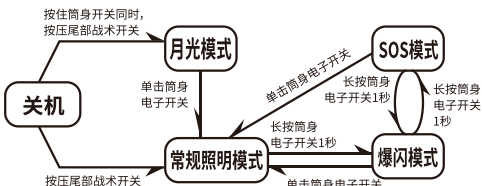

档位记忆：

产品具有档位记忆功能，每次开机产品会记忆关机前使用的档位（记忆档位只能是常规照明模式的低、中、高档位以及月光档位，极亮档不做记忆，若在极亮档关机，下次开机则进入到高亮档）。

电量显示：

在开机时指示灯显示电量，电量指示灯在开机3秒后熄灭；
电量在80%以上显示绿灯；
电量在50%-80%，绿灯闪烁；
电量在20%-50%之间，显示红灯；
电量在20%以下，红灯闪烁，提示电量不足。

低电量提示：

电量不足时，电量指示灯红灯以每秒钟闪烁3次持续闪烁，当前点亮的LED灯每3分钟闪烁两次，提示更换电池。

低电降档：

检测到电池电压低于3.0V，常规照明模式下会逐步的自动降低当前工作档位，直到降低到低亮档。

限时保护：

产品极亮档具有限时保护设计，在极亮档工作时，3600流明亮度下工作1分钟左右，会逐渐降低到1000流明左右，然后会根据温度安全性来调节亮度。

温控保护：

产品温度高于安全值，会通过温控降低产品亮度，以避免产品损坏和伤及用户。

注意事项

- 携带时请将电池盖旋松半圈，让产品断电，避免在携带时误点亮，如果在携带中误点亮，会耗掉电能，同时也可能会因产品发热而烧坏头灯周围物体；
- 如果长时间不使用手电，请将电池从产品中取出，否则可能会因电解液泄漏或电池爆炸而损坏灯；
- 儿童须在成人的监督下使用本产品；
- 产品亮度高，请勿直视，否则会造成眼睛伤害和短暂失明；
- 请勿将装有电池的产品投入火中，否则会发生爆炸；
- 请勿将打开电池盖的产品投入水中；
- 请勿将电池的正负极短接。

保修条款

- 灯具产品自售出之日起15天内，在正常使用情况下，出现产品质量问题，客户可选择更换新品，所换产品应为同型号同规格的新品；如同型号同规格的产品停止生产时，则调换不低于原产品性能的同品牌同类产品。
- 5年免费保修期：灯具产品自售出之日起5年内（电池1年内），用户在正常使用情况下，出现产品质量问题，则享受免费维修服务。5年后可以进行有偿维修，只收取成本费用。
- 消费者保修时凭《保修卡》、购物发票或收据或网上购物时零售商提供的号码与经销商联系，由经销商对消费者提供服务，我公司将对经销商提供服务支持。

- 5 years free warranty: If the product has quality problems under normal use within 5 years (1 year for the battery) from the date of sale, the user has free repair services. The user may pay to repair the product out of warranty. Only charge the cost of parts.
- Consumers warranty with the "warranty card", shopping invoices or receipts, or online shopping retailer provided the number to contact the dealer. The dealer will provide services to consumers. CYANSKY will provide service support to the dealer.
- The warranty service does not cover any damage or failure caused by:
 - Extreme high dropping, unauthorized modification, or alteration;
 - Improper use, storage, or maintenance;
 - Battery leakage;
 - Saltwater and corrosion damage the product;
 - Ordinary wear, tear, and fading.

Included

P25 V2.0 flashlight, 1 * BL2150U battery, spare waterproof O-ring, hand rope, clip, spare rubber switch, manual, warranty card, TYPE-C charging cable, holster.

CYANSKYLIGHT CO., LTD

Web: <https://www.cyanskylight.com>
Email: info@cyanskylight.com
Tel: +86-769-82829209
Address: 601, 2# Building, Xiangdong Technopark, 7# Bainishan Middle Road, Dalingshan Town, Dongguan, 523000, China



- 保修服务不包括由以下原因造成的任何损坏或故障：
 - 过高掉落、擅自修改或改造；
 - 使用、存放或维护不当；
 - 电池漏液；
 - 盐水和腐蚀性损坏机组；
 - 维护不当造成的损坏；
 - 普通磨损/褪色。

包装清单

P25 V2.0 手电，一节BL2150U电池，备用密封胶圈，手绳，抱夹，备用橡胶开关，说明书，保修卡，TYPE-C充电线，手电套。

东莞市亦明电子有限公司

网站: <https://www.cyanskylight.com>
邮箱: info@cyanskylight.com
电话: 0769-82829209
地址: 广东省东莞市大岭山镇白泥山中路7号向东科技园2号楼6楼



双面印刷 折后尺寸：74x140mm